

### DS-2CE56D5T-IT1/IT3 HD1080P EXIR Turret Camera




**EXIR**



#### Key features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- Up to 20/40m IR distance
- IP66 weatherproof & vandal proof
- UTC function(Pelco C protocol)

#### Dimensions

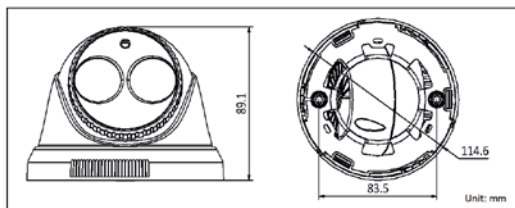

#### Accessories



#### Available models

DS-2CE56D5T-IT1  
DS-2CE56D5T-IT3

	DS-2CE56D5T-IT1	DS-2CE56D5T-IT3
<b>Camera</b>		
Image Sensor	2 MP CMOS Image Sensor	
Signal System	PAL/NTSC	
Effective Pixels	1920(H)*1080(V)	
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR	
Shutter Time	1/25(1/30) s to 1/50,000 s	
Lens	3.6mm (2.8mm, 6mm, 8mm optional)	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 82.6°(3.6mm), 103.5°(2.8mm), 54.4°(6mm), 38°(8mm)	Angle of View: 82.6°(3.6mm), 103.5°(2.8mm), 54.4°(6mm), 38°(8mm), 24.4°(12mm), 18.9°(16mm)
Lens Mount	M12	
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°	
Day & Night	ICR	
Synchronization	Internal synchronization	
Video Frame Rate	1080p@25fps/1080p@30fps	
HD Video Output	1 Analog HD output	
CVBS Output	1Vp-p Composite Output(75Ω/BNC)	
S/N Ratio	More than 52dB	
WDR	120dB	
<b>Menu</b>		
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT	
Camera ID	On/off (15 characters, position programmable)	
AGC	Support	
D/N Mode	Color/BW/EXT	
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual	
Privacy Mask	On/Off, maximum 8 zones	
Motion Detection	On/Off, maximum 4 zones	
BLC	Support	
Anti-flicker	On/off	
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic	
Functions	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM	
<b>General</b>		
Working Temperature/ Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12 VDC	
Power Consumption	Max. 4W	Max. 5W
Weather Proof Ratings	IP66	
IR Range	Up to 20m	Up to 40m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)	
Dimensions	Φ 114.6 × 89.1mm(Φ 4.5" × 3.5")	
Weight	300g (0.66 lb)	