


OUTDOOR AF 100X ZOOM PT DOME CAMERA

SK-V106/Z240, SK-V107/Z240

CAMERA
MINI PTZ DOME


Features

- Compact PTZ Dome Camera
- Max 93°/sec panning
- 64 Preset positions
- Special controller available(option : SK-AR11 or SK-AR12)
- Pan - 0° ~ 350°, Tilt - 5° ~ 90° : SK-V106/Z240
- Pan - 360°(Endless), Tilt - 5° ~ 90° : SK-V107/Z240
- 100X Zoom(Optical : 10X, Digital : 10X)
- Powerful & Level selectable BLC
- Built-in OSD
- Day & Night function(ICR)
- Auto focus/Auto IRIS
- RS-485 interface(Multi protocol support : SK-P, PELCO-D)

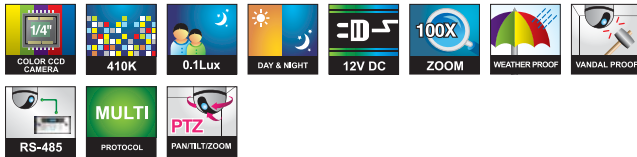

Dimension

Unit : mm

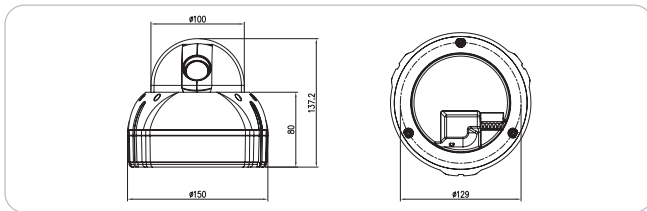

Option



Specification

MODEL	SK-V106/Z240	SK-V107/Z240
CCD Type	1/4" COLOR SONY SUPER HAD CCD	
Pixel	410K	
Scanning	2:1 Interlace	
Sync. Type	Internal	
Resolution	Color : 480TV-Line , B/W : 520TV-Line	
Video Output	1.0Vp-p(Sync. Negative) Termination 75Ω	
S/N Ratio	45dB or More(AGC OFF)	
Min. Illumination	0.1Lux(F1.8)	
Gamma	γ = 0.45 typ.	
Shutter Speed	Auto : 1/60(1/50) ~ 1/10,000sec Manual : 1/60(1/50), FLK(1/120), 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000	
White Balance	ATW/AWC/3,200°K/5,600°K/MANUAL/[R,B]	
OSD	YES	
Zoom	Optical Zoom 10X, Digital Zoom 10X	
Focal Length	f=3.8(W) ~ 38.0(T)mm/F 1.8(W) ~ F2.8(T)	
Angle of view	51.2° (Wide End), 5.58° (Tele End)	
Min. Working Distance	0.35M(Wide End), 0.8M(Tele End)	
Moving Speed	PAN : 9°/s ~ 93°/s, TILT : 9°/s ~ 66°/s	
Moving Angle	PAN : 0° ~ 350° TILT : 5° ~ 90°	PAN : 360° Endless TILT : 5° ~ 90°
External Communication	RS-485	
Power Supply	Regulated 12V DC ± 10%	
Current Consumption	Max. 800mA	
Operation Temp.	-10°C ~ 50°C	
Preservation Temp.	-20°C ~ 60°C	
Dimension	Ø150x134.3(H)mm	
Weight	Approx. 1.2kg	